

Lasting Performance That Saves Time and Money

AU-1 COMMERCIAL CONSTRUCTION SEALANT

EXCEEDS ASTM C-920 & TCBSAT-30*

AU-1 is a premium-grade, high performance, non-ageing, non-sagging, elastomeric construction sealant. It's easy to apply, tool and clean up saving time and money. **AU-1** exhibits exceptional UV resistance and maintains high elasticity in all climates. Its innovative formula bonds at the molecular level creating superior adhesion. Unaffected by years of exterior exposure, **AU-1** will not lose its bond or elasticity under varying mechanical stress. **AU-1** carries a weatherproof performance warranty guaranteeing long-term building integrity.

SPECIFICATIONS:

- ASTM C-920 Class 25
- ASTM C-834 -18°C
- Fed Spec TTS-00230C
- Meets physical requirements of AAMA 808.3
- TCBSAT-30*

FEATURES & BENEFITS:

- Ready to use, no mixing, reduces prep time
- No primer required for most substrates reducing application time
- Seals Vertical and Horizontal joints up to 2" wide
- 50% joint movement ($\pm 25\%$) and 800% elongation
- Exceptional resistance to weathering, UV and extreme joint movement
- Excellent paintability

USES:

- Expansion and control joints
- Concrete panel joints
- Windows, doors and siding
- Tilt-wall joints
- Precast units
- EIFS

SUBSTRATES:

- Concrete
- Masonry
- Stucco
- Glass
- Metal
- Building wraps
- Fascia
- Flashing



* TCBSAT-30 or Tower Common Building Substrate Adhesion Test. **AU-1** is applied to 30 common building substrates and tested in accordance with a modified version of ASTM C-794. The minimum adhesion values used in TCBSAT-30 are significantly higher than those required by ASTM C-920.

For product information or samples call: **866.897.7568**


For tech support email: tech@towersealants.com

Online at: www.towersealants.com



TOWER
SEALANTS®

Exceptional resistance to weathering, UV, and extreme joint movement

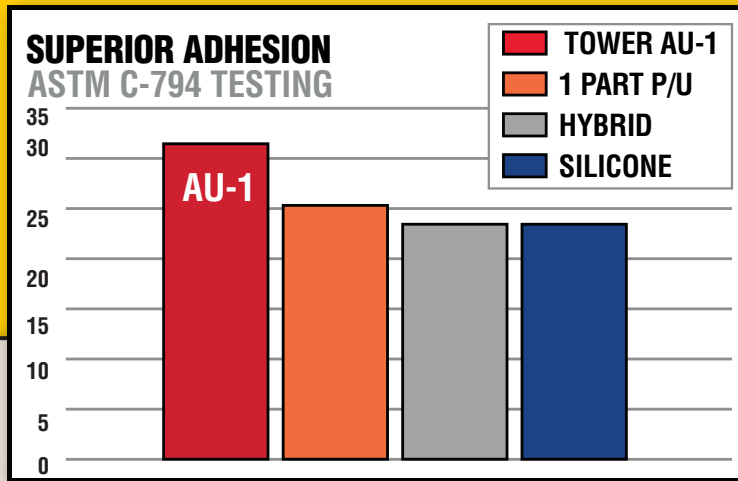

A SIZE FOR ANY APPLICATION:

- 10.1 oz. cartridge
- 20 oz. sausage
- 5 gal. pail
- 55 gal. drums



A new standard in construction sealants

For product information or samples call: 866.897.7568
For tech support email: tech@towersealants.com
Online at: www.towersealants.com



TOWER
SEALANTS®