

## EXCEEDS ASTM C-920 & TCBSAT-30\*



### FEATURES AND BENEFITS:

- Industry leading durability
- Exceptional resistance to weathering, UV rays & extreme joint movement
- Time savings - simplified application & cleaning process reduces labor
- Seals vertical & horizontal joints up to 2" wide
- No priming required for most substrates
- Excellent for painting
- 70% joint movement ( $\pm 35\%$ ) & 800% elongation

### SUBSTRATES:


- Concrete
- Masonry
- Stucco
- Glass
- Metal
- Building wraps
- Fascia
- Flashing

### SPECIFICATIONS:

- ASTM C-920 Class 35
- ASTM C-834 -18°C
- Fed Spec TTS-00230C
- Meets physical requirements of AAMA 808.3
- TCBSAT-30\*

### USES:

- Expansion & control joints
- Concrete panel joints
- Windows, doors & siding
- Tilt-wall joints
- Precast units
- EIFS

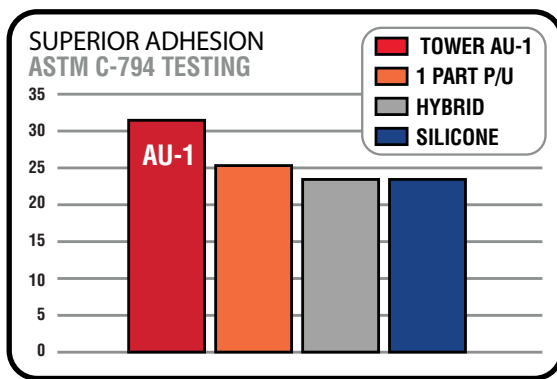

\* TCBSAT-30 or Tower Common Building Substrate Adhesion Test. AU-1 is applied to 30 common building substrates and tested in accordance with a modified version of ASTM C-794. The minimum adhesion values used in TCBSAT-30 are significantly higher than those required by ASTM C-920.

## A NEW STANDARD IN CONSTRUCTION SEALANTS

Introducing AU-1, a premium quality, high performance, **waterproof, elastomeric construction sealant**. It's easy to apply. Tool and clean up saves you time and money. With excellent adhesion and long-term durability, **AU-1** makes you and your job more efficient. It has exceptional resistance to UV rays, and maintains high elasticity in all climates. **AU-1** bonds to substrates at a molecular level creating superior adhesion that is unaffected by years of outdoor exposure. When you need solid gold performance, choose **AU-1**.

- Exceptional resistance to weathering, UV, & extreme joint movement
- Improved Application, Adhesion & Durability vs. Polyurethanes

### A SIZE FOR ANY APPLICATION:



10.1 oz. Cartridge



20 oz. Sausage



2 gal. Pail  
or 5 gal. Pail